


EMERGENCY LIGHTS

LED LOW-PROFILE THERMOPLASTIC EMERGENCY LIGHT

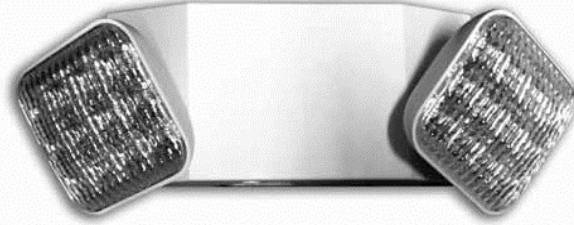

ELECTRICAL CHARACTERISTICS

Model #	Housing	Heads	Lamp Type	Voltage	Lamp Watts
JEM-2HLED-WH	Thermoplastic	Adjustable Heads	12 LED per Head	120-277V	2 x 1.8w

PACKING INFORMATION

Units Per Carton	Weight Per Carton	Cube Per Carton
12 pcs.		

Construction & Application

Illumination

- Long lasting, efficient ultra-bright white LEDs.
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.

Electrical

- Dual 120V/277V voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Surface mount via quick-connect back plate; fits most standard size junction boxes and snaps into place to make internal electrical connections.
- Conduit mount knockout on top of housing.
- Suitable for wall or ceiling mount.

Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

Warranty/Listing

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.

PRODUCT DIMENSIONS

