


JOB NAME: _____

DATE: _____

DIMENSIONS:

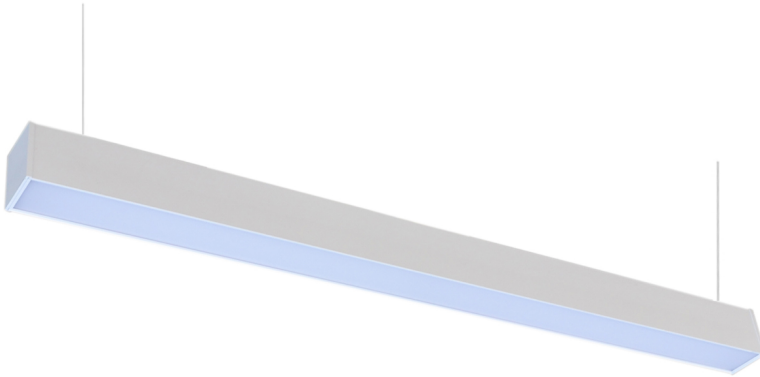

SCL-4FT-40W-35K-D
SCL-4FT-40W-40K-D
SCL-4FT-40W-50K-D

**LED ARCHITECTURAL SUSPENDED
 COMMERCIAL LIGHTS**

The LED Architectural Suspended Commercial Light is for indoor application where continuous linear lighting is desired such as perimeter lighting applications. This luminaire is suitable for surface, suspended or recessed, individually or in continuous rows while offering an optional uplight component with an internal baffle that separates uplight and downlight components. It can be mounted recessed on surface mount kit.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC 50/60Hz
- Wattage: 40W
- Color Temperature: 3500K, 4000K and 5000K
- Lumens: 4400LM
- Ambient Temperature: -13°F ~ 104°F
- Dimmable: 0~10V dimmable
- CRI: >80
- Power Factor: >0.95
- Efficacy: 110LM/W
- IP Rating: IP20
- Life Span: 50,000 hrs.

HOUSING SPECIFICATIONS:

- Housing: White, aluminum housing
- Lens: Opal
- Suspended mounting

WARRANTY: 5 years

MODEL	WATTS	VOLTS	LUMENS	COLOR TEMP
SCL-4FT-40W-35K-D	40W	120~277V	4252LM	3500K
SCL-4FT-40W-40K-D	40W	120~277V	4569LM	4000K
SCL-4FT-40W-50K-D	40W	120~277V	4569LM	5000K
SCL-KIT	Surface mounting kit			

APPLICATIONS:

Long life LEDs coupled with high efficiency drivers provide quality illumination. rated to deliver performance of >50,000 hours. Optional supplied with dimmable driver (1-10V). Standard 4-foot nominal white. Aircraft cable for suspended-mount application in office areas, retail stores, corridors, classrooms, libraries, hospitals, etc.

Without screws on the end caps, quicker fitting for continuous run without shadow. suspended, ceiling, recessed mounted for different applications.

CERTIFICATIONS:

